



**Material:** Casing is made of black powder - coated sheet iron.

**Type of Protection:** IP 44

**Insulation Class:** B

**Directive:** Complying with EN 60034-1

**Protection of Motor:** Thermal overload protection is available upon request.

◆ 2 years warranty.

✓ Speed can be adjusted using an optional controller.

◆ Ideal for many applications in air-conditioning and cooling, speed controllable by transformers or electronic controls. Circular metal protection grille, with chrome coated, which can be easily removed for cleaning and maintenance.


**Application Areas:** Machines cooling, electric control panel cooling, warm air flow apparatuses, cooling in welding machines, laboratories, residential and industrial areas etc.

	VOLTAGE	FREQUENCY	POWER	CURRENT	CAPACITOR	SPEED	AIR FLOW	NOISE LEVEL	PERM. AMB. TEMP.	MAX. BACK PRESSURE	WEIGHT
TYPE	V	Hz	W	A	( $\mu$ f/VDB)	(rpm)	(m <sup>3</sup> / h)	db(A)	(°C)	Pa	kg
BDRAX 200-2K	230	50	70	0,32	2,5/400	2730	750	62	65	130	2,1
BDRAX 200-4K	230	50	60	0,3	1/400	1380	520	70	55	75	2,3
BDRAX 250-2K	230	50	110	0,48	4/400	2750	1720	65	60	125	2,7
BDRAX 250-4K	230	50	60	0,3	1,5/400	1400	870	60	55	110	2,9
BDRAX 300-2K	230	50	170	0,77	5/400	2400	2300	73	65	155	3,4
BDRAX 300-4K	230	50	70	0,32	2/400	1350	1700	67	50	155	2,6
BDRAX 350-2K	230	50	270	1	6/400	2400	3650	75	55	160	4,1
BDRAX 350-4K	230	50	110	0,59	3/400	1325	2800	67	45	160	4,3




# AC AXIAL FANS


Frequency 50Hz - Air Temperature 15 °C - Barometric pressure 760 mmHg - Air specific weight 1,22 Kg/m<sup>3</sup>




BDRAX 200-2K




BDRAX 200-4K

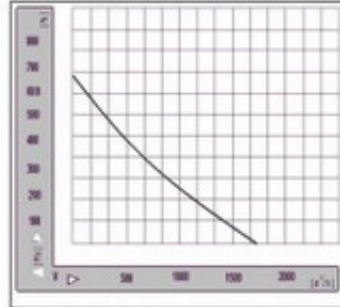


BDRAX 250-2K

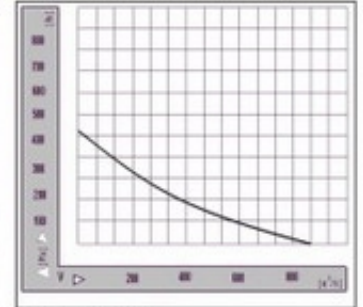


BDRAX 250-4K

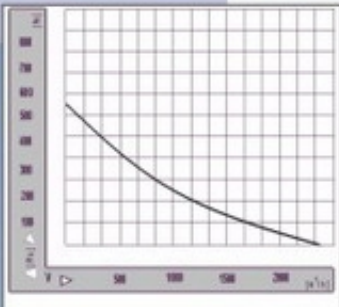


BDRAX 300-2K



BDRAX 300-4K



BDRAX 350-2K



BDRAX 350-4K

TYPE	A	B	C	D	E	F	G	H
BDRAX 200-2K	84,5	11,5	199	283	232	68	66	182
BDRAX 200-4K	84,5	11,5	199	283	232	68	66	182
BDRAX 250-2K	88	13	251	343	281	86	73	233
BDRAX 250-4K	88	13	251	343	281	86	73	233
BDRAX 300-2K	92	12	299	338	330	104	80	282
BDRAX 300-4K	92	12	299	338	330	104	80	282
BDRAX 350-2K	90	13	346	425	385	104	95	338
BDRAX 350-4K	90	13	346	425	385	104	95	338

Dimensions are in ( mm )

